

ROSEWOOD



The Rosewood is made compact to heat and elevate small areas.


- Heats small areas
- Flat radiant top allows for cooking
- 6mm top plate and baffle for durability
- 6mm steel firebox for durability

FINISH	VHT Black
STAND	Pedestal
FIREBOX	Steel
ESTIMATE PEAK OUTPUT	12kW
APPROX. HEAT AREA	120m ²
EMISSIONS	0.9g/kg
EFFICIENCY	66%
DIMENSIONS (WxDxH)	493 x 510 x 640mm
FIREBOX DIMENSIONS (WxDxH)	325 x 360 x 230mm
LOG SIZE	300mm
WEIGHT	75kg
FLUE SPIGOT SIZE	6"/150mm



Minimum distance to heat sensitive materials (mm) when a flue deflector is fitted, and floor protector sizes as per standard AS/NZS 2918:2001.

FLUE SHIELD	A	B	C	D	E	F	G	H
FUF	100	450	300	116	250	290	697	551
AGA	125	425	300	116	225	315	672	526
	I	J	K	L	M	N	R	W
FUF	500	725	888	1377	1124	598	779	493
AGA	500	725	913	1342	1099	598	744	493

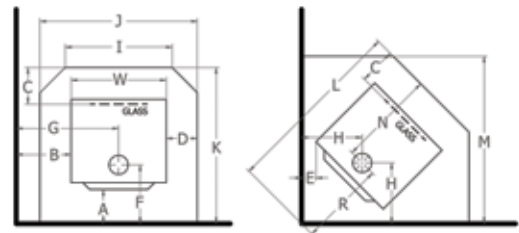

FUF: Flomet Universal Flue system with full length decorative heat shield.

AGA: Acom/Air Group Special Insulated Flue System

