



GREENFIRE™ GAS FIREPLACES



regency-fire.com.au

GF950L

Large Gas Fireplace

The Regency Greenfire™ GF950L is a contemporary, unrestricted, TV friendly fireplace. Featuring an impressive 7.8kW heat output, realistic flame and log set, this fire is perfect for open plan living areas. Hang your TV or Artwork above the fireplace as low as 191mm**. With lower clearances for TV and artwork than ever before you can create a central focal point in your room and enjoy the flames dancing as you watch your favorite show!


Flexibility in installation options with less restrictions allows this unit to be finished with combustible finishing options. Our new optional Wi-Fi module allows you to control your fireplace from your smartphone with the Regency Fireplaces APP. Create the look you desire!

STANDARD FEATURES

- Wide landscape fire with driftwood log set
- Realistic ceramic glowing ember bed
- Black enamel reflective side panels
- 3-speed fan
- Electronic ignition
- RF (Radio Frequency) remote control – with timer & thermostat function
- Ceramic glass with high quality dress guard
- Direct vent room sealed technology
- Nominal maximum gas consumption :
35 MJ/hr NG/28 MJ/hr Propane/28 MJ/hr ULPG
- Heat output : 7.8kW NG/ 6.3kW Propane/ 6.4kW ULPG
- **Combustible finishing materials for certain installation types,**
refer to manual for details

OPTIONS

- 22mm finishing trim with door frame in metallic black
- Contemporary door frame & fascia in black or brushed stainless steel
- Premium glass fascia in black
- Clean edge finish option (no fascia required)*
- Black or stainless steel inner door frame to mix & match
- Stainless steel reflective side panels
- Optional framing kit
- Option of NG or Propane/ULPG
- Horizontal or vertical flue options
- AstroCap™ Venting System for horizontal termination
- Heat distribution kit & air duct to distribute heat to other rooms
- Wi-Fi module with free Regency Fireplaces APP
- Power flue kits



when installed with a short horizontal flue kit on NG

*Clean edge finish requires non-combustible finishing.

**Heat deflector (mantel) must overhang front of TV by 51mm. Refer to installation manual for full instructions.

NOTE: All images are shown without mandatory dress guard. Flame picture varies by flue run & gas type.





GF950L shown with door frame and fascia in black.



GF950L shown with door frame and fascia in brushed stainless steel.



GF950L shown with clean front 22mm finishing trim in black.

GF1500L

Extra Large Gas Fireplace

The Regency Greenfire™ GF1500L provides an immense linear view of the Regency's leading flame and log package. Perfect for contemporary spaces and open concept living areas, heat is distributed throughout the home with maximum efficiency. The black enamel reflective panels further accentuate the fire – drawing friends and family closer to stay a while longer. Hang your TV or Artwork above the fireplace as low as 254mm**. Experience smaller clearances to TV's and Artwork allowing you to create a functional and beautiful room that you will want to spend time in, day after day.

Flexible installation and finishing options, combined with choice of accessories allows you to make the GF1500L the perfect complement to any room. Our new optional Wi-Fi module allows you to control your fireplace from your smartphone with the Regency Fireplaces APP.

STANDARD FEATURES

- Wide landscape fire with driftwood log set
- Realistic ceramic glowing ember bed
- Black enamel reflective side panels
- 3-speed fan
- Electronic ignition
- Ceramic glass with high quality dress guard
- RF (Radio Frequency) remote control – with timer & thermostat function
- Direct vent room sealed technology
- Nominal maximum gas consumption :
50 MJ/hr NG/49 MJ/hr Propane/44 MJ/hr ULPG
- Heat output : 10.8kW NG/ 10.7kW Propane / 9.7kW ULPG
- **Combustible finishing materials for certain installation types,**
refer to manual for details


OPTIONS

- 22mm finishing trim with door frame in metallic black
- Contemporary door frame & fascia in black or brushed stainless steel
- Premium glass fascia in black
- Clean edge finish option (no fascia required)*
- Black or stainless steel inner door frame to mix & match
- Optional framing kit
- Propane/ULPG conversion kit
- Horizontal or vertical flue options
- AstroCap™ Venting System for horizontal termination
- Heat distribution kit & air duct to distribute heat to other rooms
- Wi-Fi module with free Regency Fireplaces APP

*Clean edge finish option requires non-combustible finishing.

**Heat deflector (mantel) must overhang front of TV by 51mm. Refer to installation manual for full instructions.

NOTE: All images are shown without mandatory dress guard. Flame picture varies by flue run & gas type.



when installed with a short
horizontal flue kit on NG



GF1500L shown with brushed stainless steel inner door frame and clean front 22mm finishing trim in black.



GF1500L shown with door frame and fascia in brushed stainless steel.



GF1500L shown with black inner door frame and glass fascia in black.

GF1500LST

Extra Large See-Through Gas Fireplace


There are 2 sides to every fire. This see-through gives you 2x the viewing area and 2x the control. With an artistically designed driftwood log set, that provides a unique view on each side; you can now benefit from maximum heat and maximum flame, in 2 different spaces.

STANDARD FEATURES

- Wide see-through landscape fire with driftwood log set, viewable from each side
- Realistic ceramic glowing ember bed, viewable from each side
- Black enamel reflective side panels
- Two 3-speed fans, one on each side
- Electronic ignition
- RF (Radio Frequency) remote control allows you to independently operate each fan
- Ceramic glass with high quality dress guard, on each side
- Dual heat output allows you to control which area is better suited for higher heat
- Direct vent room sealed technology
- Nominal maximum gas consumption :
50 MJ/hr NG/49 MJ/hr LPG/44 MJ/hr ULPG
- Heat output : 10.2kW NG/ 10kW LPG/ 9kW ULPG

OPTIONS

- 22mm finishing trim with door frame in metallic black
- Contemporary door frame & fascia in black or brushed stainless steel
- Premium glass fascia in black
- Clean edge finish option (no fascia required)
- Black or stainless steel inner door frame to mix & match
- Optional framing kit
- Option of NG or Propane/ULPG
- Horizontal or vertical flue options
- AstroCap™ Venting System for horizontal termination
- Heat distribution kit & air duct to distribute heat to other rooms (up to 2 can be fitted)



when installed with a short horizontal flue kit on NG

NOTE: All images are shown without mandatory dress guard. Flame picture varies by flue run & gas type.



GF1500LST (view B) shown with clean edge finish (no fascia).



GF1500LST (view A) shown with door frame and fascia in brushed stainless steel.



GF1500LST (view B) shown with door frame and fascia in black.

OTHER FEATURES

FIREPLACE MODEL	NOMINAL MAXIMUM GAS CONSUMPTION			OUTPUT		
	NG	PROPANE	ULPG	NG	PROPANE	UPLG
GF1500LST	50 MJ/hr	49 MJ/hr	44 MJ/hr	10.2 kW	10 kW	9 kW
GF1500L	50 MJ/hr	49 MJ/hr	44 MJ/hr	10.8 kW	10.7 kW	9.7 kW
GF950L	35 MJ/hr	28 MJ/hr	28 MJ/hr	7.8 kW	6.3 kW	6.4 kW
GF900C	32 MJ/hr	28 MJ/hr	28 MJ/hr	6.9kW	6 kW	6 kW

NOTE : kW output based on horizontal flue run.

DESIGN OPTIONS



Clean edge finish (no fascia)



Door frame and fascia in black



Door frame and 22mm finishing trim in black



Glass fascia in black with black inner door frame



Glass fascia in black with brushed stainless steel inner door frame



Door frame and fascia in brushed stainless steel

FASCIA DIMENSIONS (mm)	GF1500LST		GF1500L		GF950L	
	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
Clean edge finish option (no fascia)	1267	459	1267	459	1000	450
22mm finishing trim	1300	495	1300	495	1035	480
Door frame and fascia in black	1359	549	1359	549	1091	540
Door frame and fascia in brushed stainless steel	1359	549	1359	549	1091	540
Glass fascia in black or with brushed stainless steel inner door frame	1460	654	1460	654	1192	641

FINISHES



Clean Front with 22mm Finishing Trim



Black Fascia




Brushed Stainless Steel Fascia




Black Glass Fascia

SPECIFICATIONS (mm)

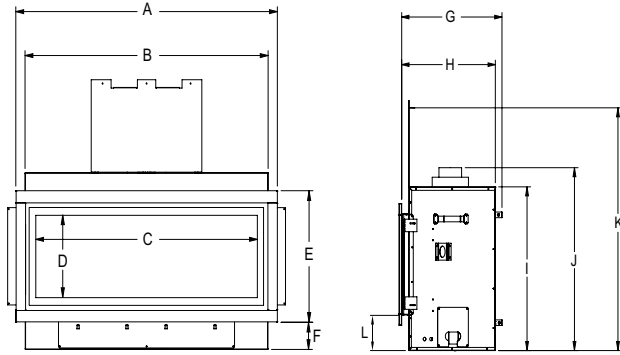



	GF1500LST	GF1500L	GF950L	GF900C
A	1532	1359	1091	1091
B	1439	1263	996	996
C	1152	1151	890	890
D	346	344	332	332
E	549	549	540	540
F	194	113	113	113
G	516	560	560	560
H	477	523	523	523
I	844	737	726	726
J	920	824	796	796
K	1005	945	933	933
L	241	159	159	159

FRAMING

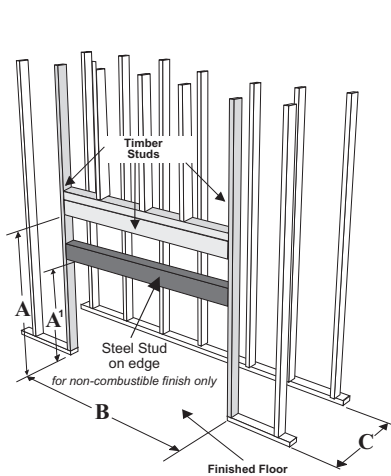

NOTE: Steel stud must be installed after unit has been positioned in place and prior to installation of non-combustible finishing. Steel stud is required for non-combustible finish only.

Optional framing kit available.
See manual for details.




	GF1500LST	GF1500L	GF950L/GF900C
A	1011	945	940
A1	--	846 (non-combustible finish)	756 (non-combustible finish)
B	1545	1394	1127
C	516*	568	552
D	n/a	1225	1156
E	n/a	1460	1273
F	n/a	2065	1800

*Consult manual for additional information.

Important note for GF1500L, GF950L & GF900C : A minimum thickness of 12mm non-combustible facing board compliant with AS1530-1 and AS1530-3 is required when using the non-combustible flush finishing option. A minimum thickness of 10mm - 19mm combustible facing board is required when choosing the combustible flush finishing option. Note: must maintain 13mm air gap all around the perimeter of the appliance when choosing this option.

CLEARANCES

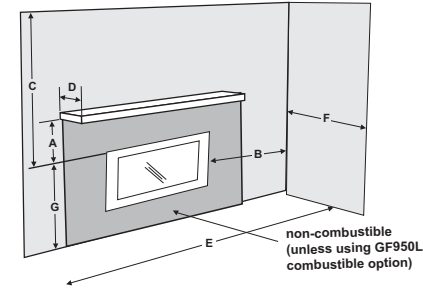


CLEARANCES	GF1500LST	GF1500L	GF950L/GF900C
A* (min. - max.)	330 - 559	254 - 457	191 - 420
B	203	152	146
C	1162	1162	1003
D** (min. - max.)	25 - 305	25 - 305	25 - 305
E	1676	1524	1480
F	914	914	787
G*	702	617	605


*Distance is measured from top of hot air outlet.

**Clearances vary for different mantle depths. Please refer to manual for details.

For Non-Combustible Finish

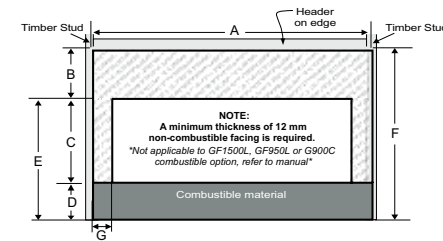

For Combustible Finish

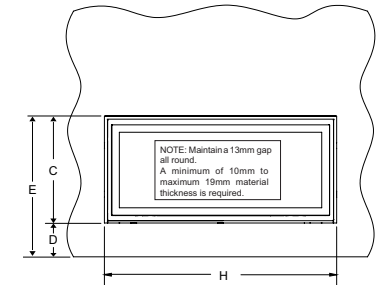

	GF1500LST	GF1500L COMBUSTIBLE	GF1500L NON-COMBUSTIBLE	GF950L/GF900C COMBUSTIBLE	GF950L/GF900C NON-COMBUSTIBLE
A	1583	--	1432	--	1165
B	330	--	266	--	191
C	457	482	446	470	446
D	241	148	159	148	159
E	698	630	605	618	605
F	1028	--	871	--	796
G	158	--	--	--	--
H	--	1288	--	1021	--

REMOTE CONTROLS

RF (Radio Frequency) Remote Control is programmable up to 7 days a week. The remote can be operated from another room, automatically modulating the temperature of your Gas Fire, increasing efficiency and reducing running costs. It also allows you to set and maintain a desired temperature, as well as adjust the flame height and fan speed.



APP CONTROL

Put the power of flame directly in your hand. With the Regency Fireplaces App, you can take control of your fireplace turning it on/off, adjusting the flame height, fan and temperature of your gas fireplace heater directly on your smartphone. The optional Wi-Fi enabled module provides the ultimate fireplace control. (Available on the GF950L & GF1500L)



DIRECT VENT TECHNOLOGY


Direct Vent Technology is a fantastic innovation that maintains the total air quality of the home. It draws air from outside the home for combustion rather than warm room air.

This means greater heating efficiency because all the warm air stays in your room. Direct Vent fireplaces can be flued vertically or out through an external wall, making them ideal for multi-storey homes where conventional vertical flues are not practical.

HEAT DISTRIBUTION

Increase the effectiveness of your fireplace by dispersing warm air from the fireplace to remote locations in the same room or other rooms in your home by using the heat distribution kit.

NOTE: 1 Outlet and duct per Fan kit. Image is for visual reference only, please refer to manual for full specifications.

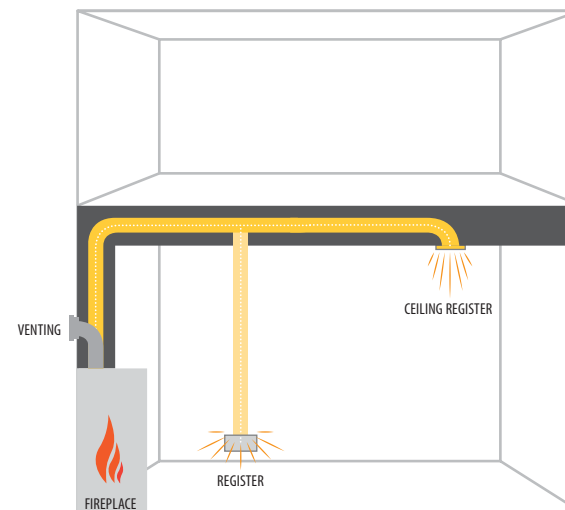

Optional Heat Distribution Kit

ENJOY YOUR REGENCY — FOR LIFE

You'll be happy with your Regency for years to come, our Limited Lifetime Warranty guarantees it. Not only have we invested in quality workmanship, the finest materials and durable heavy-duty construction but we have carefully selected a dealer network that is committed to your satisfaction. All Regency gas fires pass stringent Australian testing standards. We know that you will be as proud of your Regency as we are. Limited Lifetime Warranty covers the following components: Combustion chamber, heat exchanger, burner tubes and glass (thermal breakage). Refer to owner's manual for details.

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up to date information. Stainless steel inner panels will naturally change tone over time. Heating capabilities of units are affected by: drafts under doorways or through flooring, large glass areas not covered by heavy drapes, ceiling heights greater than 2.4m or cathedral type ceilings, poor or no insulation and geographical locations.



WHY CHOOSE REGENCY?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do; from when that very first heater rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products. We back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Zoned heating with our beautiful, reliable and convenient Regency products, can cut your fuel bills in half. Enjoy the timeless comfort of a Regency fire.

1-2-3 INSTANT FIREPLACE

No chimney? No problem! The Regency Zero Clearance range enables you to have a gas log fire installed into a timber or steel framed/plasterboard "mock" chimney breast without the expense and effort of a purpose built brick chimney.





for your nearest dealer visit:
regency-fire.com.au
or call 1800 081 978

Fireplace Products Australia Pty Ltd.

99 Colemans Rd,
Dandenong South VIC, 3175
Australia
Phone: +1800 081 978
Fax: +613 9799 7822
Email: sales@regency-fire.com.au

**Distributor WA
Air Group Australia**

131 Bannister Road
Canning Vale WA 6155
Australia
Phone: +08 9350 2200

**Distributor NZ
Aber Holdings Ltd**
17 Mainstreet Place,
PO Box 10095, Te Rapa
Hamilton 3241
New Zealand
Phone: +64 7849 7585

**Disclaimer: Appearance of flames varies with installation and fuel type.
Star ratings vary based on flue type and configuration.**

©2024 FPI Fireplace Products International Ltd. Regency® and Regency Greenfire™ are the registered and/or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved. (02/24)
Part no. 944-295

Your Regency Dealer