


AS2918 CLEARANCES TEST REPORT SUMMARY



THE **HUGE** SERIES

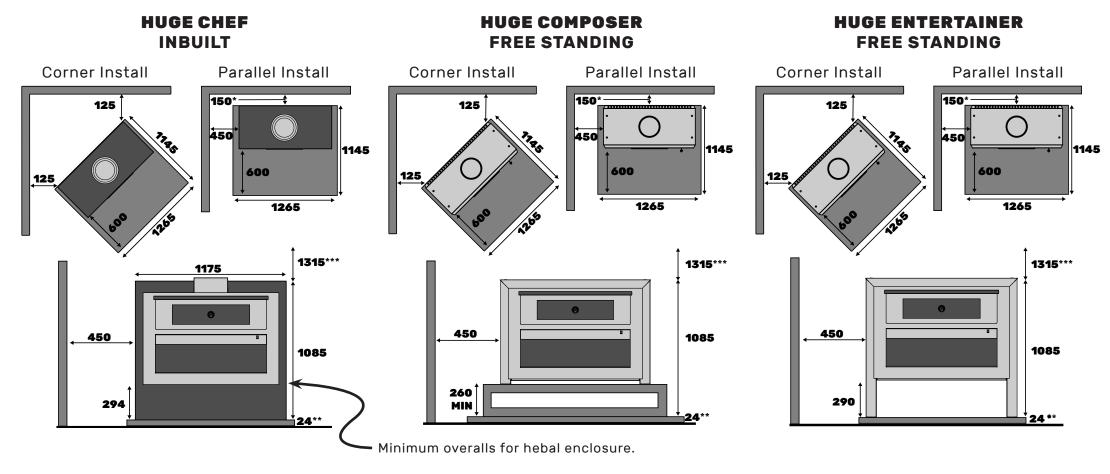

^{*150 -} With a rear shield 1180x770x1.5 of steel level to top of appliance with a 20mm air gap between rear of appliance and a 180° stainless steel rear flue shield or full outer casing must be fitted.



^{250 -} With a 180° stainless steel rear flue shield or full outer casing must be fitted. 350 - Without any of the above conditions to reduce rear clearances.

A minimum thickness of 24mm floor protector (0.1m2 K/W non-combustible compressed board) must be used under and in front of the appliance base.

A clearance to combustibles of 1315mm above the unit.