


## **AS2918 CLEARANCES TEST REPORT SUMMARY**



## THE **ICONIC** SERIES

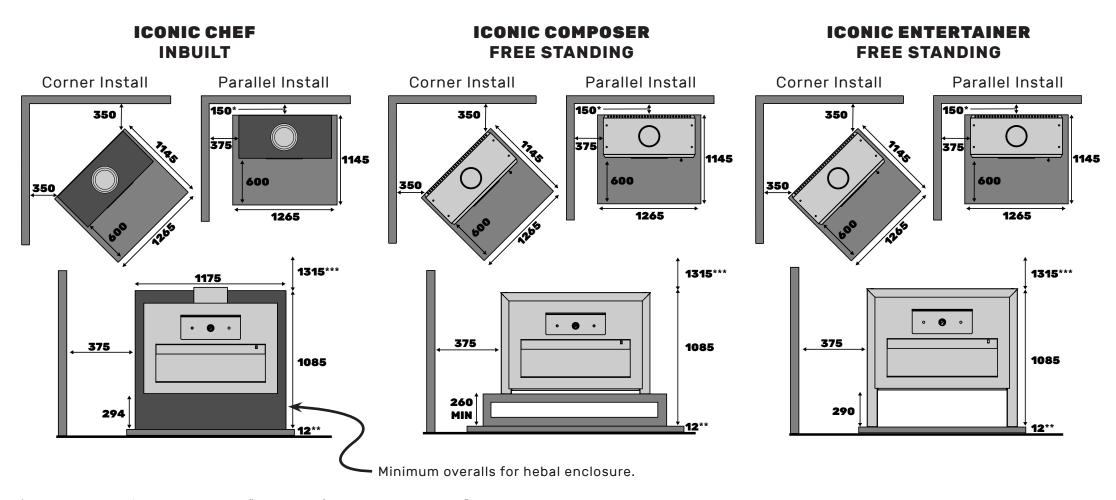

- \* With a 180° stainless steel rear flue shield or full outer casing must be fitted to reduce clearance to 150mm. Otherwise the rear wall clearance must be 400mm.
- \*\* A minimum thickness of 12mm floor protector (0.052m2 K/W non-combustible compressed board) must be used under and in front of the appliance base.
- \*\*\* A clearance to combustibles of 1315mm above the unit.