


Hearth Dimensions


MASPORT Klondike

Minimum Hearth Size

Square

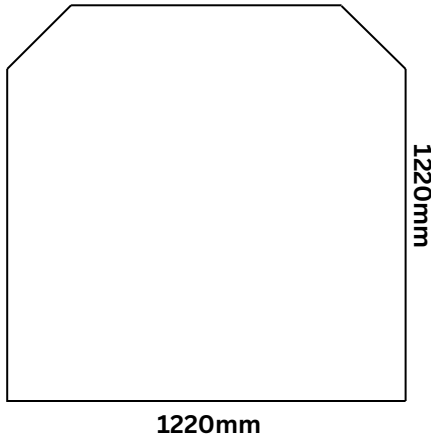

Corner

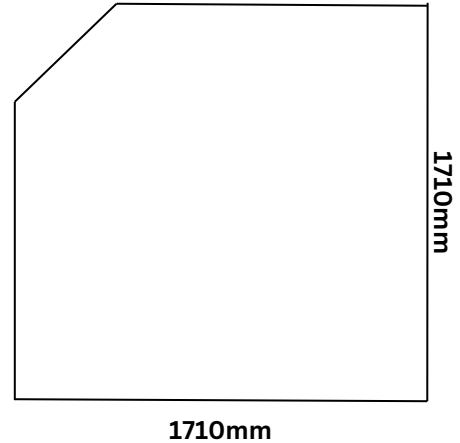

Minimum Hearth Thickness




The Australian Requirements for a hearth on a combustible floor are as follows:

- A minimum of 10mm Compressed Fibre Cement Sheeting and,
- A minimum of 5mm non-combustible topping (e.g. Tiles, stone, bricks, etc.)


Minimum Wall Clearance

Square

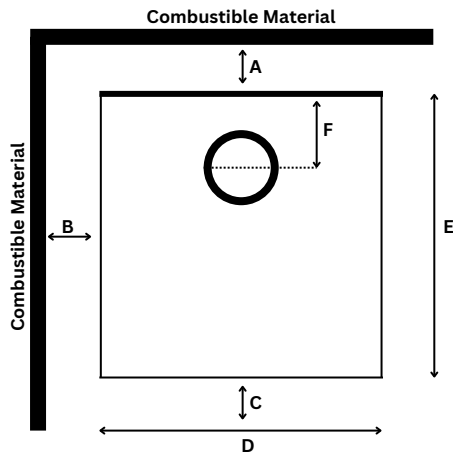

| | | | | | |
|-----|-----|-----|-----|-----|----|
| A | B | C | D | E | F |
| 900 | 900 | 300 | 380 | 460 | 40 |

Corner

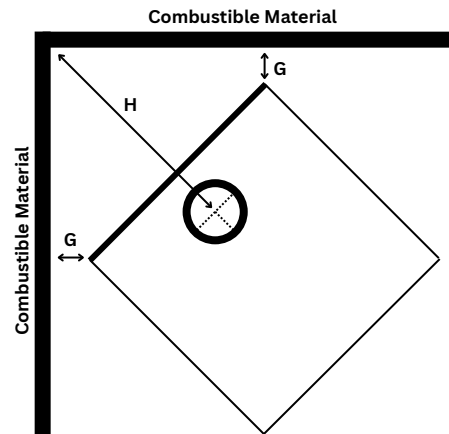

| | |
|-----|------|
| G | H |
| 900 | 1543 |

All Measurements in mm