


# HEAT SHIELD MODICA 600GF

## CLEARANCE TO COMBUSTIBLES WITH HEAT SHIELD ATTACHED

■ Combustible surface

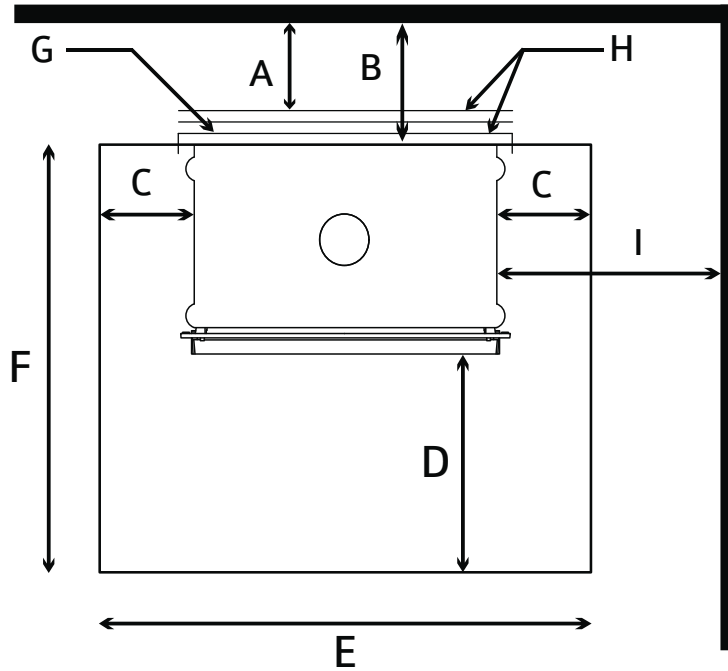

		Heat shield with 25mm air gap
A	Heat shield to back wall	150*
B	Rear of heater to rear wall	232
C	Hearth extension from the side of the heater	200
D	Hearth extension from the glass opening*	450
E	Width of hearth	1000
F	Depth of hearth	910
G	Air gap between each skin	25
H	Double steel heat shield	3 min.
I	Heat shield to side wall	800

\*The rear wall clearance can be reduced to 150mm from a combustible wall when installed with a 900mm high x 180° stainless steel rear flue shield fitted between the solid casing and the active flue.

### Hearth recommendation:

It is highly recommended that Hebel Block material to be used as the hearth both directly below the appliance and extending beyond the appliance base. Please consult with retailer or installer if you wish to change the hearth material or clearances.

\* Please refer to Hearth Clearance document for further information.