


Hearth Dimensions


OSBURN 2300

Minimum Hearth Size


Square

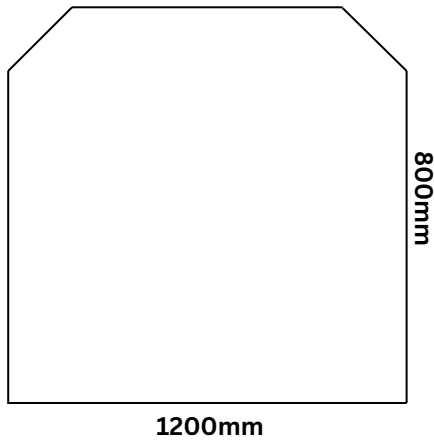

Corner

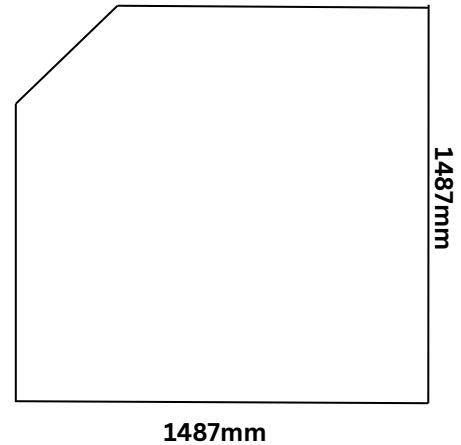

Minimum Hearth Thickness

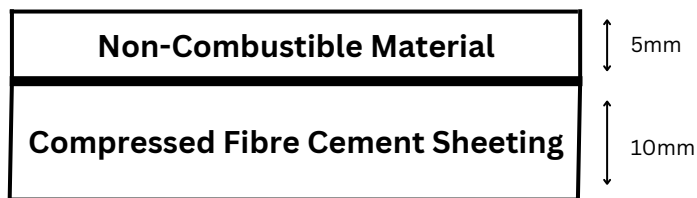


The Australian Requirements for a hearth on a combustible floor are as follows:

- A minimum of 10mm Compressed Fibre Cement Sheeting and,
- A minimum of 5mm non-combustible topping (e.g. Tiles, stone, bricks, etc.)


Minimum Wall Clearance

Square

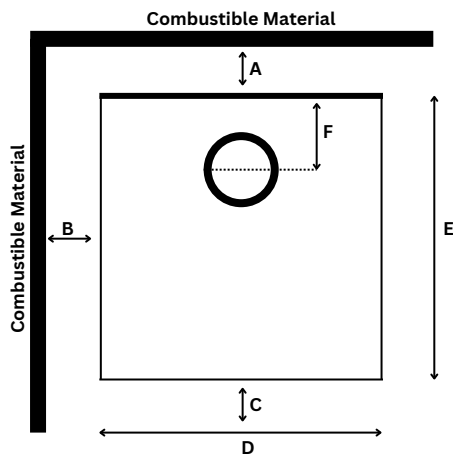

| | | | | | |
|-----|-----|-----|-----|-----|-----|
| A | B | C | D | E | F |
| 255 | 450 | 300 | 653 | 786 | 171 |

Corner

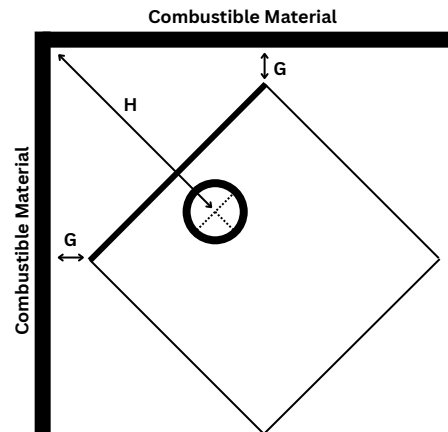

| | |
|-----|-----|
| G | H |
| 250 | 856 |

All Measurements in mm