

VISTA SERIES









Peak Heat Output

16 kW

COMBINED EFFICIENCY	67%
Emissions	1.5 gm/kg
Log Size (max)	40-45 cm
FIREBOX SIZE	41 L
GLASS SIZE	66 cm ²
WEIGHT	125 кд

The Vista Series woodstove makes an excellent choice for heating spaces small to medium spaces. Despite its compact size, this is a high-performance woodstove, engineered for powerful heat output, high efficiency and ease of use, and Pacific Energy's floating firebox of heavy-gauge steel.



FEATURES

East-West loading


Reliable, durable Non-Catalytic Technology Multi-port Combustion Air Injection System Easy one-touch operation Airwash Technology for clear, clean glass Inside and outside combustion air capable Heavy plate steel top

PERFORMANCE OPTIONS

135 m³/hr Fan Easy-to-use ash disposal system

DESIGN OPTIONS

Legs - choice of 2 finishes (nickel and black) Pedestal base Arched door - choice of 2 finishes (nickel and black)

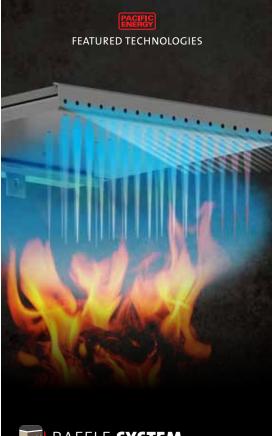



BAFFLE SYSTEM

Pacific Energy is a recognized industry leader in "clean burn" technology, as exemplified in our unique high capacity baffle system for preheating secondary combustion air for re-burning. By burning the combustible elements in the air, we improve our stoves' environmental performance while significantly reducing the amount of wood that is consumed.



FLOATING FIREBOX

Our floating firebox system is legendary in the industry. Solidly designed with steel brick-support rails, it allows key parts to freely expand and contract, which reduces metal fatigue and adds years of life to the entire fireplace. The steel baffle (part of the clean-burning secondary combustion system) and the flame shield (which protects the stove top from intense heat) are all part of the floating firebox system.



KNIFE EDGE DOOR


A formed and welded knife edge opening creates a superior air tight seal to the door gasket while strengthening the stove face. This is a more labor intensive design but our experience has proven this is the best way to manufacture a fireplace.



SINGLE LEVER

It's never been simpler to achieve a clean, efficient flame. With Pacific Energy systems, a single, easy-to-operate air control lever can regulate the entire burn.

FOR MORE INFORMATION VISIT www.pacificenergy.net



AIR WASH

BAFFLE SYSTEM

FLOATING FIREBOX

KNIFE EDGE DOOR

SELF SEALING **ASH DUMP**

SINGLE LEVER


FLOOR PROTECTOR DIMENSIONS


FLOOR PROTECTOR: 6mm Thick cement fiber sheet with a thermal resistance of 0.41m²degK/W

Extending In front of Door Opening (mm)	From Side of Door Opening (mm)		
300	200		

CLEARANCES TO COMBUSTABLES

	VERTICAL (mm)				CORNER (mm)	
	Α	В	С	D	E	F
Flue Pipe	375	350	525	655	250	570
Flue Pipe with Single Shield & Locating Ring	250	350	400	655	200	520
Flue Pipe with Double Shield & Locating Ring	175	350	325	655	200	520
Flue Pipe with single length Decromesh/Shield	250	350	400	655	200	520





Distributed by:



1300 474 868 www.pivotstove.com.au

