


1250 GF2R CLEARANCES

TIMBER FRAME

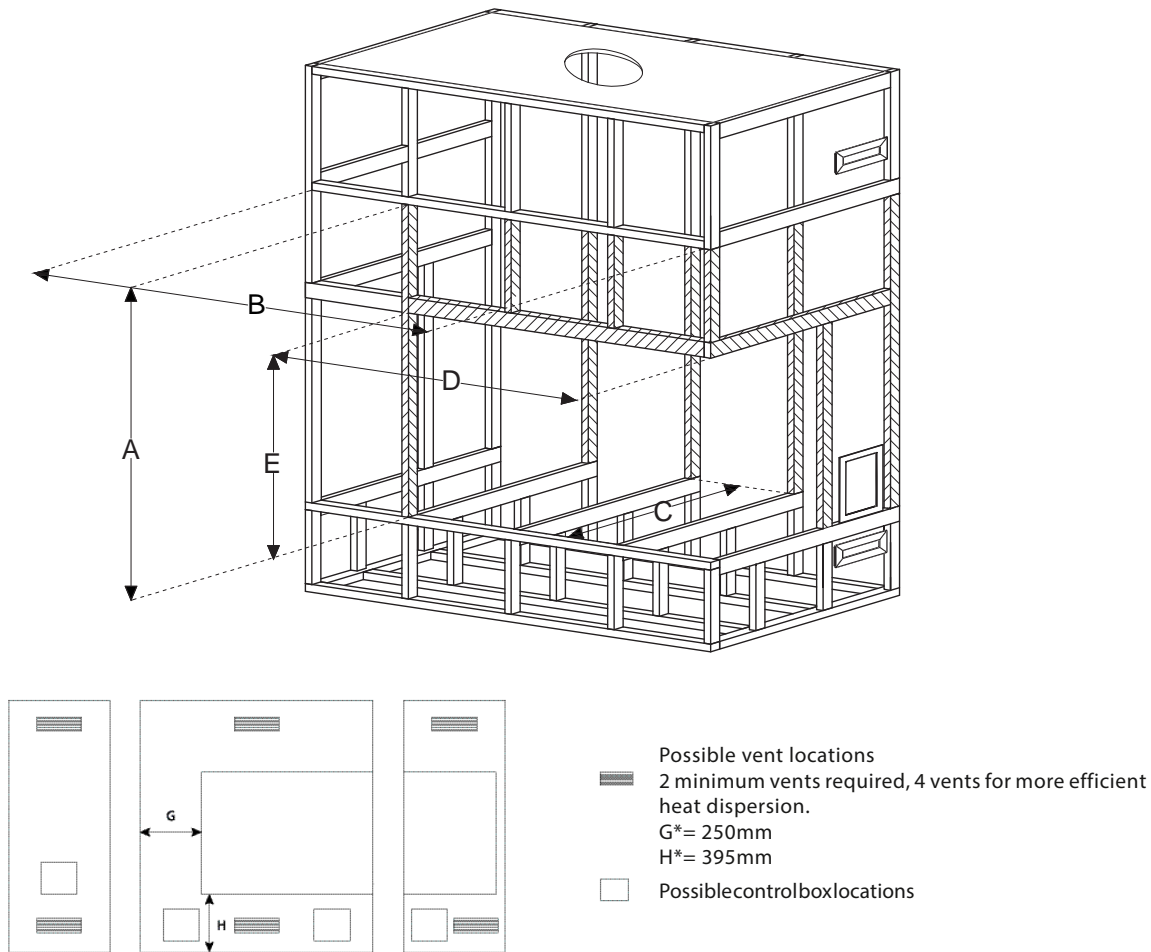

CLEARANCE TO COMBUSTIBLES


Unit Dimensions			Timber Frame			Metal Studs Infills to be installed after Unit is in place (Clearance between unit and metal stud infill)		Option for smaller depth clearance: Metal Studs fixed to rear combustible wall. 25mm Steel Battens fixed to combustible wall +13mm Firestop Board + 50mm air gap to unit
In mm			Clearance to Combustibles in mm			Installation dimensions in mm		
			Unit Height +500mm top	Unit Width +250mm	Unit Depth +250mm to back	Unit Width +50mm to left hand metal stud	Unit Height +150mm top	Unit Depth + 88mm
H	W	D	A	B	C	D	E	C*
665	1260	380	1165	1760	630	1360	815	468

- Extra notes:
- For timber frame installations the unit can be either floor mounted or mid mounted. However, for steel frame installations, the appliance must be mid mounted.
 - Drawings above are for visual illustration purposes only. When the appliance is symmetrical you may choose to change the location of the control box or vents given you meet the minimum clearance requirements.
 - For installations where the control box is below the appliance – to the side of the cavity, you may choose to install the vent below the control box (not shown in the drawings) given the appliance is raised high enough to allow the minimum clearances and there is adequate space for the vent.
 - The external façade/surrounding of the timber/steel frame should be constructed with 9mm Villa board (minimum).

*G dimension is only applicable if the control box is installed to the side of the cavity, in line or above from the bottom of the appliance. Similarly, H dimension is only applicable if the control box is installed either directly below the appliance or below the appliance – to the side of the cavity

1250 GF2R CLEARANCES

METAL FRAME

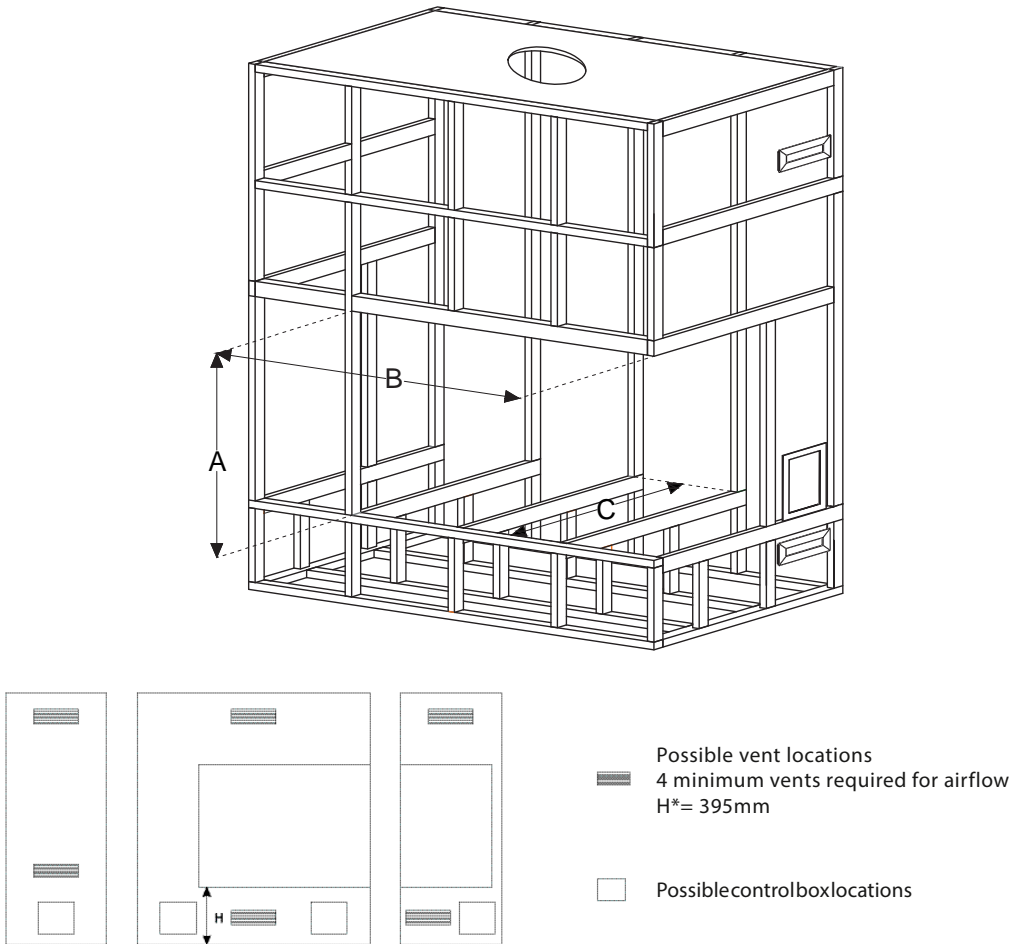

CLEARANCE TO COMBUSTIBLES

Unit Dimensions			Metal Stud Frame		
In mm			FOR METAL STUD FRAME, UNIT MUST BE IN PLACE		
			Clearance to the inside of the metal stud		
			Unit Height +50mm top	Unit Width +150mm to inner side of left hand metal stud	Depth Clearance Metal Studs fixed to rear combustible wall. 25mm Steel Battens fixed to combustible wall +13mm Firestop Board +50mm air gap to unit
H	W	D	A	B	
665	1260	380	715	1560	468

Extra notes:

- For timber frame installations the unit can be either floor mounted or mid mounted. However, for steel frame installations, the appliance must be mid mounted.
- Drawings above are for visual illustration purposes only. When the appliance is symmetrical you may choose to change the location of the control box or vents given you meet the minimum clearance requirements.
- For installations where the control box is below the appliance – to the side of the cavity, you may choose to install the vent below the control box (not shown in the drawings) given the appliance is raised high enough to allow the minimum clearances and there is adequate space for the vent.
- The external façade/surrounding of the timber/steel frame should be constructed with 9mm Villa board (minimum).

*G dimension is only applicable if the control box is installed to the side of the cavity, in line or above from the bottom of the appliance. Similarly, H dimension is only applicable if the control box is installed either directly below the appliance or below the appliance – to the side of the cavity